

FURUNO®

Introducing an innovative breakthrough in electromagnetic compass technology

INTEGRATED HEADING SENSOR

Model PG-1000

- **Electromagnetic compass providing a highly accurate and stable readout of ship's compass heading**
- **Maintenance free operation**
- **Automatic compensation for deviation and heeling error**
- **Auto correction of magnetic variation error with a GPS receiver input providing variation data with respect to the area**
- **Compact waterproof case for a simple installation**
- **Heading data output in NMEA 0183 and AD-10 formats**



The FURUNO PG-1000 is a new, inexpensive electromagnetic compass. It provides a highly accurate and stable readout of the ship's heading thanks to the sophisticated structure by three-axis magnetometer, inclinometer and integral vibrating gyrosensor.

The PG-1000 detects terrestrial magnetism and produces compass data. The data can be utilized in serial formats such as NMEA 0183 and FURUNO AD-10. It is sent to various equipment that need accurate and stable heading data. Typical applications include Radar Echo Trail and True Motion, Video Plotters, Scanning Sonars, etc.

When connected with a GPS navigator, magnetic variation correction can be made automatically. A True Heading readout is possible as modern GPS receivers output compass variation data in memory with respect to the vessels geographic areas. Because of its high accuracy, the PG-1000 can be used as a backup system for the vessel's gyro compass .

The PG-1000 also has an automatic re-calibration capability. Once compensated at the time of installation, the PG-1000 will continue to detect the magnetic deviation error and carry out automatic re-calibration while it is in use.



The future today with FURUNO's electronics technology.

FURUNO ELECTRIC CO., LTD.

9-52 Ashihara-cho, Nishinomiya City, Japan Telephone: +81 (798) 65-2111
Telex: 5644-325, Telefax: +81 (798) 65-4200, 66-4622, 66-4623

offered by Busse-Yachtshop.com

Catalogue No. M-374a

TRADE MARK REGISTERED
MARCA REGISTRADA

SPECIFICATIONS OF PG-1000

- 1. **Accuracy** ±1.5° rms
- 2. **Compensation** Automatic compensation
for deviation and heeling error
- 3. **Freedom of tilt** ±45°
- 4. **Angular velocity** 60°/s max.
- 5. **Output rate** 40 Hz (25 ms)

6. Interface

Output

- NMEA0 183 format
\$- - HDG, \$- - HDT, \$- - HDM
- AD-10 format

Input

- NMEA 0183 format
\$- - RMC, \$- -VTG

ENVIRONMENT (IEC 60945 testing)

- Temperature: -15° to +55°C
- Waterproofing: IPX5 (IEC 60529),
CFR-46 (USCG standard)

POWER SUPPLY

10 to 35 VDC, less than 3 W

EQUIPMENT LIST

Standard


- | | |
|---|--------|
| 1. Heading Sensor PG-1000 | 1 unit |
| 2. Interface Cable (with 2 x 6p connectors)
MJ-A6SPF0007-100 | 10 m |
| 3. Installation Materials | |

Optional


- 1. Interface Cable
 - For NMEA0183
MJ-A6SPF0012-100 (with 2 x 6p connectors), 10 m
 - For AD-10
MJ-A6SPF0003-050 (with 1 x 6p connector), 5 m
MJ-A6SPF0007-100 (with 2 x 6p connectors), 10 m

Dimensions and weight

0.3 kg 0.7 lb

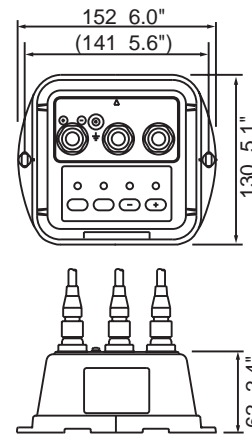

Note: This is heading sensor utilizes the earth's magnetism. Therefore steel-boat installations should be carefully done.

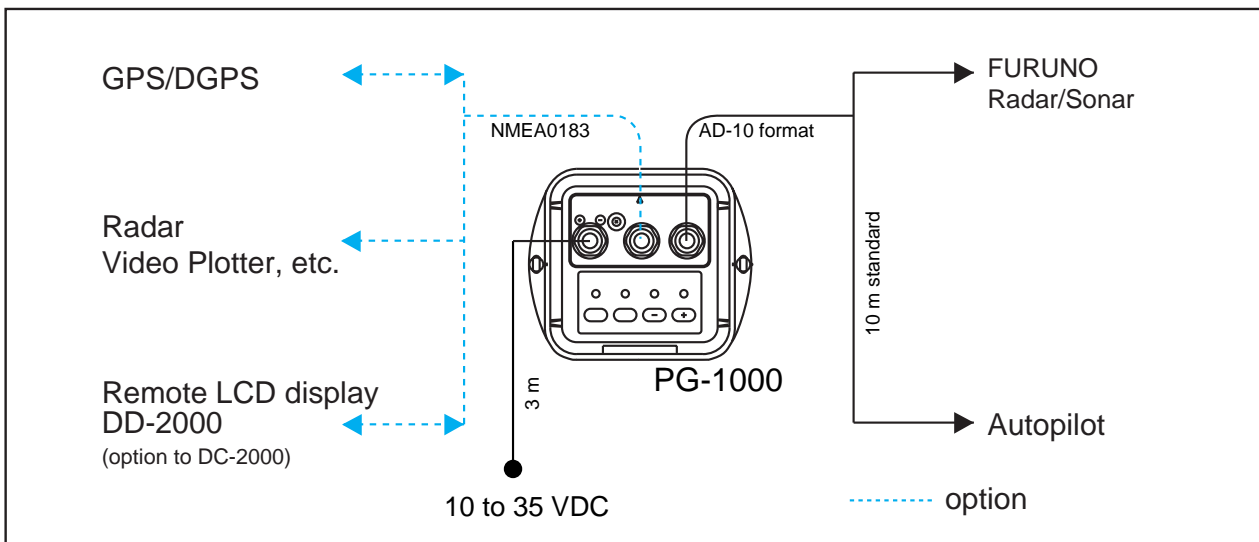

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO U.S.A., INC.
Camas, Washington, U.S.A.
Phone: +1 360-834-9300 Telefax: +1 360-834-9400

FURUNO (UK) LIMITED
Denmead, Hampshire, U.K.
Phone: +44 2392-230303 Telefax: +44 2392-230101

FURUNO FRANCE S.A.
Bordeaux-Mérignac, France
Phone: +33 5 56 13 48 00 Telefax: +33 5 56 13 48 01

FURUNO ESPAÑA S.A.
Madrid, Spain
Phone: +34 91-725-90-88 Telefax: +34 91-725-98-97

FURUNO DANMARK AS
Hvidovre, Denmark
Phone: +45 36 77 45 00 Telefax: +45 36 77 45 01

FURUNO NORGE A/S
Ålesund, Norway
Phone: +47 70 102950 Telefax: +47 70 127021

FURUNO SVERIGE AB
Västra Frölunda, Sweden
Phone: +46 31-7098940 Telefax: +46 31-497093

FURUNO SUOMI OY
Helsinki, Finland
Phone: +358 9 341 7570 Telefax: +358 9 3417 5716

99108B Printed in Japan